

INTERACTIVE DISPLAYS

Android 11 OS



RAM 4GB



Quad-Core CPU




ROM 32GB



Dual OS




Android 11




Windows OS (with OPS)


Quad View For Applications

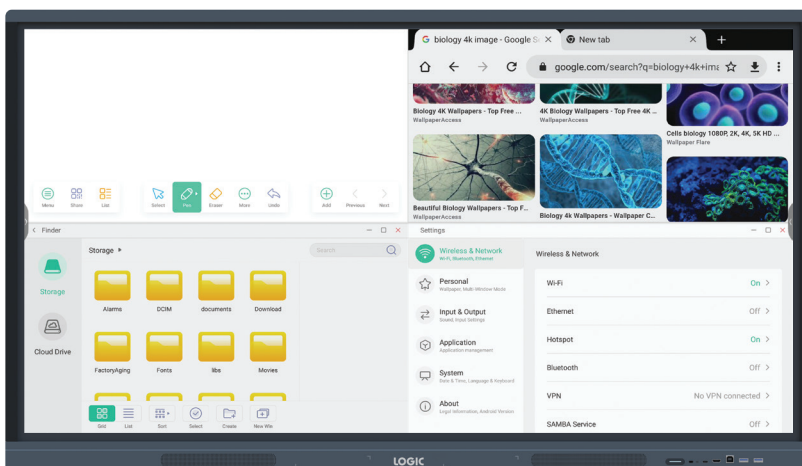

Smooth and Natural Writing Experience

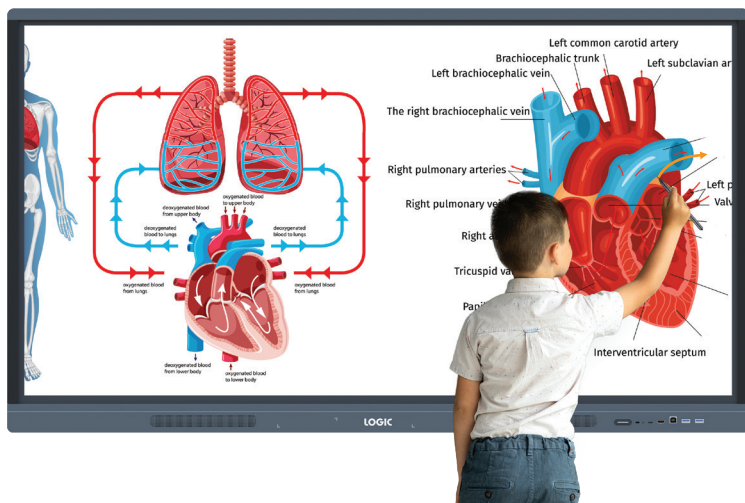


Less than 40ms Latency



Dual-tip Stylus Supports writing with 2 different colors



40-Point touch & 20 writing points
Multi-Users can write, draw and mark Simultaneously.




Input/Output Ports


High-Speed Data Transmission (1000 Mbps) New Gen **Type-C** Compatibility Advanced 11th Gen OPS (Optional)

- RAM : 8GB
- CPU : Intel Core i5
- ROM : 256GB SSD

Note With Multiple Features

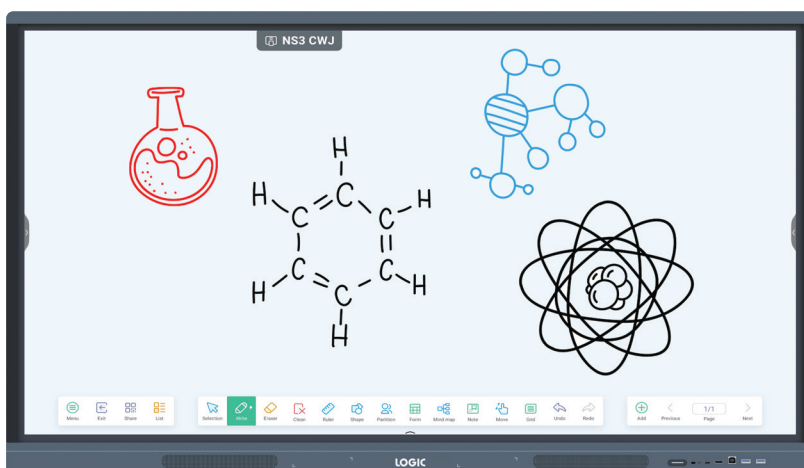

Slim & Sleek Appearance

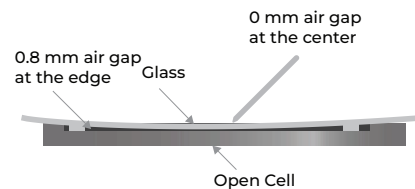

- Bezel width <15mm
- 3mm glass
- Gen1 Zero bonding

Stunning 4K UHD Visuals



Powerful Sound

Built-in speakers in the front bezel deliver audio for immersive learning.





Wireless Screen Share

Supports upto **9** Devices (Android, Windows, iOS & macOS)



Execute & Control your Schedule

Control a host of crucial screens from anywhere with secure remote functionality.

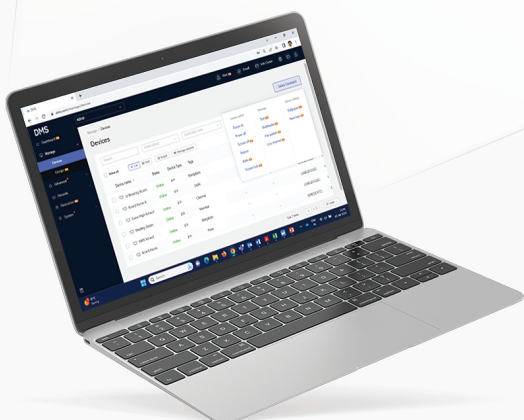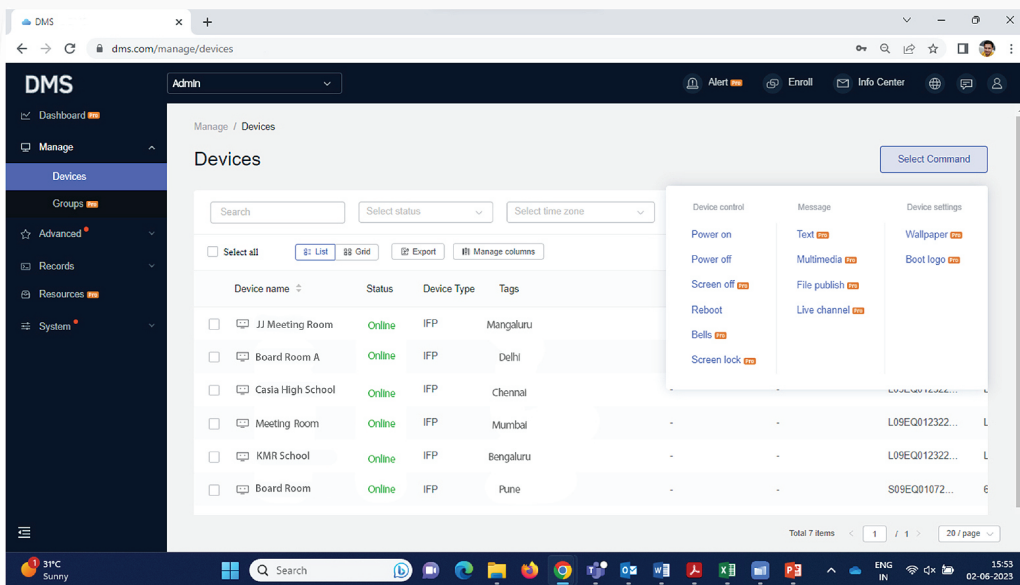

PRODUCT SPECIFICATION

MODEL	LT-IR65AX	LT-IR75AX	LT-IR86AX	LT-IR98AX	
Display	Size	65 inch	75 inch	86 inch	98 inch
	Panel Type	ADS	ADS	ADS	ADS
	Back Light Unit	DLED	DLED	DLED	DLED
	Response Time	8ms	8ms	8ms	8ms
	Aspect Ratio	16:09	16:09	16:09	16:09
	Display Area (HxV)	1428.48 × 803.52 mm	1649.664 × 927.936 mm	1895.04 × 1065.96 mm	2158.848 × 1214.352 mm
	Pixel Pitch (HxV)	0.372 × 0.372 mm	0.4296 × 0.4296 mm	0.4935 × 0.4935 mm	0.5622 × 0.5622 mm
	Resolution	3840×2160	3840×2160	3840 × 2160	3840 × 2160
	Refresh Rate	60Hz	60Hz	60Hz	60Hz
	Display Color	1.07B	1.07B	1.07B	1.07B
	Bit Rate	10bit	10bit	10bit	10bit
	NTSC Gamut	72%	72%	72%	72%
	Contrast Ratio	1200:1	1200:1	1200:1	1200:1
	Viewing Angle	178°(H/V)	178°(H/V)	178° (H/V)	178° (H/V)
	Brightness with glass (min)	400 cd/m ²	400 cd/m ²	400 cd/m ²	400 cd/m ²
Brightness with glass (typ)	450 cd/m ²	450 cd/m ²	450 cd/m ²	450 cd/m ²	
Life Time	≥50,000 Hours	≥50,000 Hours	≥50,000 Hours	≥50000 Hours	
Operating System	System Version	Android 11.0	Android 11.0	Android 11.0	Android 11.0
	RAM	4GB	4GB	4GB	4GB
	ROM	32GB	32GB	32GB	32GB
	CPU	A55×4	A55×4	A55×4	A55×4
	GPU	Mali G52MP2	Mali G52MP2	Mali G52MP2	Mali G52MP2
Touch System	Sensing Type	Infrared Recognition	Infrared Recognition	Infrared Recognition	Infrared Recognition
	Touch Recognition	Finger, Passive stylus	Finger, Passive stylus	Finger, Passive stylus	Finger, Passive stylus
	Accuracy	±1.5mm	±1.5mm	±1.5mm	±1.5mm
	Touch Point	40	40	40	40
	Minimum object Size	3mm	3mm	3mm	3mm
	Writing Height	≤3mm	≤3mm	≤3mm	≤3mm
Supporting OS	Windows/ Android/ Linux/ macOS / Chrome				
Audio	Audio Output	2.0	2.0	2.0	2.0
	Output Power	2×16W	2×16W	2×16W	2×16W
Power	Power Supply	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V~ 50/60Hz 5.5A
	Standby Power	≤0.5W	≤0.5W	≤0.5W	≤0.5W
	Power Consumption (Typ/Max)	160/ 320W	200/ 360W	350/ 520W	360W/ 558W
I/O Interface	HDMI In	3	3	3	3
	HDMI Out	1	1	1	1
	USB 2.0	1	1	1	1
	USB Type-C	1	1	1	1
	USB 3.0	4	4	4	4
	Touch USB	2	2	2	2
	VGA In	1	1	1	1
	Audio/MIC In	1	1	1	1
	Audio Out	1	1	1	1
	SPDIF	1	1	1	1
	RS232	1	1	1	1
RJ45 In	1	1	1	1	
RJ45 Out	1	1	1	1	
Physical Specifications	Dimension (L×H×D)	1488.4 × 896.6 × 87.2 mm	1709 × 1020 × 88 mm	1957 × 1160 × 100 mm	2245 × 1323 × 92 mm
	Package Dimension (L×D×H)	1628 × 208 × 1005 mm	1863 × 225 × 1140 mm	2110 × 225 × 1283 mm	2406 × 280 × 1474 mm
	VESA	600 × 400 mm	800 × 400 mm	800 × 600 mm	800 × 600mm
	Net Weight	34.95 Kg	47.30 Kg	58.55 Kg	98.5 Kg
	Gross Weight	44.70 Kg	60.55 Kg	75.90 Kg	128.1 Kg
Accessories	Power Cord	1	1	1	1
	HDMI Cable	1	1	1	1
	USB Touch Cable (Type A-B)	1	1	1	1
	Remote Control	1	1	1	1
	Writing Stylus	2	2	2	2
	Wall Mount Bracket	1	1	1	1
Environmental Conditions	Wireless Module	1	1	1	1
	Operation Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C
	Operation Humidity	10% ~ 90%RH	10% ~ 90%RH	10% ~ 90%RH	10% ~ 90%RH
	Storage Temperature	-20°C ~ 60° C	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
	Storage Humidity	10% ~ 90%RH	10% ~ 90%RH	10% ~ 90%RH	10% ~ 90%RH
Altitude	Below 5000 Meter	Below 5000 meter	Below 5000 meter	Below 5000 meter	
Optional Accessories	PC Module	OPS	OPS	OPS	OPS
Certification	BIS, EMC, CE, FCC				

** Images used are for illustration purposes only

LOGIC

EMPOWERING DIGITAL TRANSFORMATION



Toll Free (India) : 1800 2020 990
For Services & Support : servicesupport@logicav.in
For Sales Enquiries : sales@logicav.in
Website : www.logicav.in

